


MACH[®] Model C-750

ENVI[®] Control

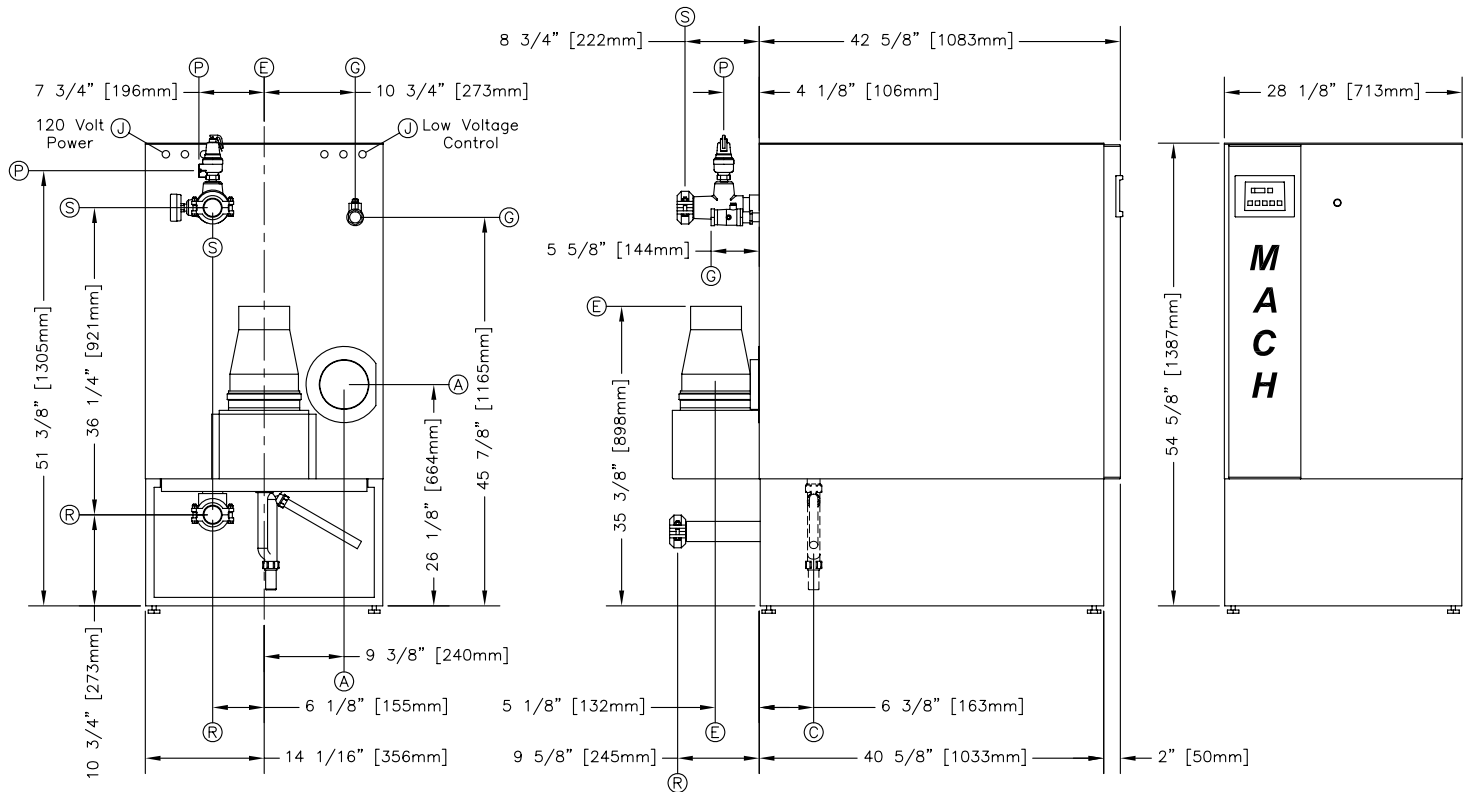

Service Clearances:
 24" [610mm] Above
 36" [914mm] Front

The MACH[®] Boiler requires category II venting (condensing-negative pressure) or category IV venting (condensing-positive pressure) as defined in ANSI Z223.1/NFPA 54/CSA-B.149 Latest Edition. Harsco Industrial, Patterson-Kelley reserves the right to make changes at any time without notification.

BOILER CONNECTIONS:

(A) Combustion Air Inlet	6" dia stub
(C) Condensate Drain	3/4"
(E) Exhaust Vent	152mm ID (6"nom ID)
(G) Main Gas Connection	1" NPT-F
(J) Wiring Junction Boxes	as marked
(P) Pressure Relief Valve	see list for selection
(R) Boiler Water Return, Victaulic [®] clamp	2" pipe, grooved
(S) Boiler Water Supply, Victaulic [®] clamp	2" pipe, grooved

Victaulic is a registered trademark of Victaulic Company, Easton, PA, USA

BOILER CONTROLS: ASME CSD-1 is standard.

Complies with GE GAP (IRI) guidelines GAP.4.1.0 and GAP.4.1.3.
 Complies with FM Global 6-4/12-69 Section 1.0

Main Gas Train: see gas train submittal
Integrated Boiler Control, ENVI [®] Series
Operating Thermostat, 70°-195°F (21°-91°C)
High Limit Thermostat, Manual Reset, 100-200°F (38°-93°C)
High Exhaust Pressure Switch, Manual Reset
LWCO, Probe Type, Manual Reset
Air Switch, Differential Pressure Type
Combustion Blower, Variable Speed, 300 watt (0.4 hp)

C.S.A. CERTIFIED RATINGS AND CAPACITIES

Fuel	<input type="checkbox"/> Natural Gas(NG)	<input type="checkbox"/> Propane(LP)
Input, BTU/hr	750,000	
Output, BTU/hr	712,500	
Boiler HP:	21.3	
Maximum Inlet Gas Pressure:	14" w.c.	
Minimum Inlet Gas Pressure:	3.5" w.c.	

Electrical Requirements	120v, 1ph, 60hz
Total Operating Amps	less than 5 amps
Operating Weight	695 lbs.
Water Content	5.9 gallons

A.S.M.E. Section IV Design Data

Maximum Pressure	80 psig
Maximum Allowable Temperature	200°F
Maximum Operating Temperature	194°F
Heated Wet Surface Area:	18.35 sq.ft.
Flow rate @ 20°F ΔT	72 GPM
Flow rate @ 40°F ΔT	36 GPM

Pressure Relief Valve	Press/Temp Gauge
<input type="checkbox"/> 80 PSIG 3/4" x 1" (standard)	0-240psi/30-240°F
<input type="checkbox"/> 30 PSIG 1"	0-100psi/30-240°F
<input type="checkbox"/> 50 PSIG 3/4" x 1"	0-100psi/30-240°F
<input type="checkbox"/> 60 PSIG 3/4"	0-100psi/30-240°F
<input type="checkbox"/> 75 PSIG 3/4" x 1"	0-240psi/30-240°F

HARSCO
INDUSTRIAL
Patterson-Kelley